



# THTCZB-20 TELESCOPIC BOOM LIFT





SPECIFICATION

01

|                        |   |
|------------------------|---|
| <b>Model</b>           | <b>THTCZB-20</b>  |
| Platform height        | 20m   |
| Working height         | 22m   |
| Load capacity          | 200kg   |
| Platform size          | 900x700mm or customize  |
| Working radius         | 11m   |
| Total size (L*W*H)     | 6.9x1.9x2.25m   |
| Storage size (L*W*H)   | 5.8x1.9x2.25m   |
| Weight                 | 4500kg  |
| Telescopic arm         | Yes   |
| Container for shipping | 1 unit / 20ft 2 units / 40ft  |
| Options                | <p>1. Standard power options:<br/>AC, diesel (Changchai) or petrol (Honda or Briggs&amp;Stratton)</p> <p>2. Battery power</p> <p>3. Hybrid power<br/>(2 power from above options)</p> <p>4. Walking assist device Color can be customized</p> |



# Tuhe Telescopic Boom Lift

Jinan Tuhe Heavy Industry Machinery Co., Ltd.



## Master control switch

Only when you keep pushing this button, can you operate the machine. It can avoid misoperation and accident.

## Emergency Lowering valve

When power cut or anything bad happens, you can lower the platform by loosen this valve.

## Electrophoresis Materials

It has a good coating effect on complex parts, and the paint film quality of electrophoretic coating is good, and the anti rust ability is strong.

## Explosion-proof Cylinder

Explosion-proof valves on the cylinders can keep equipment and personnel safe and provide long-lasting protection.

## Self Level Inspection

The level sensor will tell control system is the machine is leveled and allowed to operate.

## PLC Touch Screen Control System

You can see all the parameters on this screen and it's easy to operate the boom lift.



**Detail Name**

**Description And Picture**


**International  
Tow Bar**

German AL-KO famous brand stroing tow bar.



**Touch Screen  
Control**

Full English version control system makes it easy to operate.

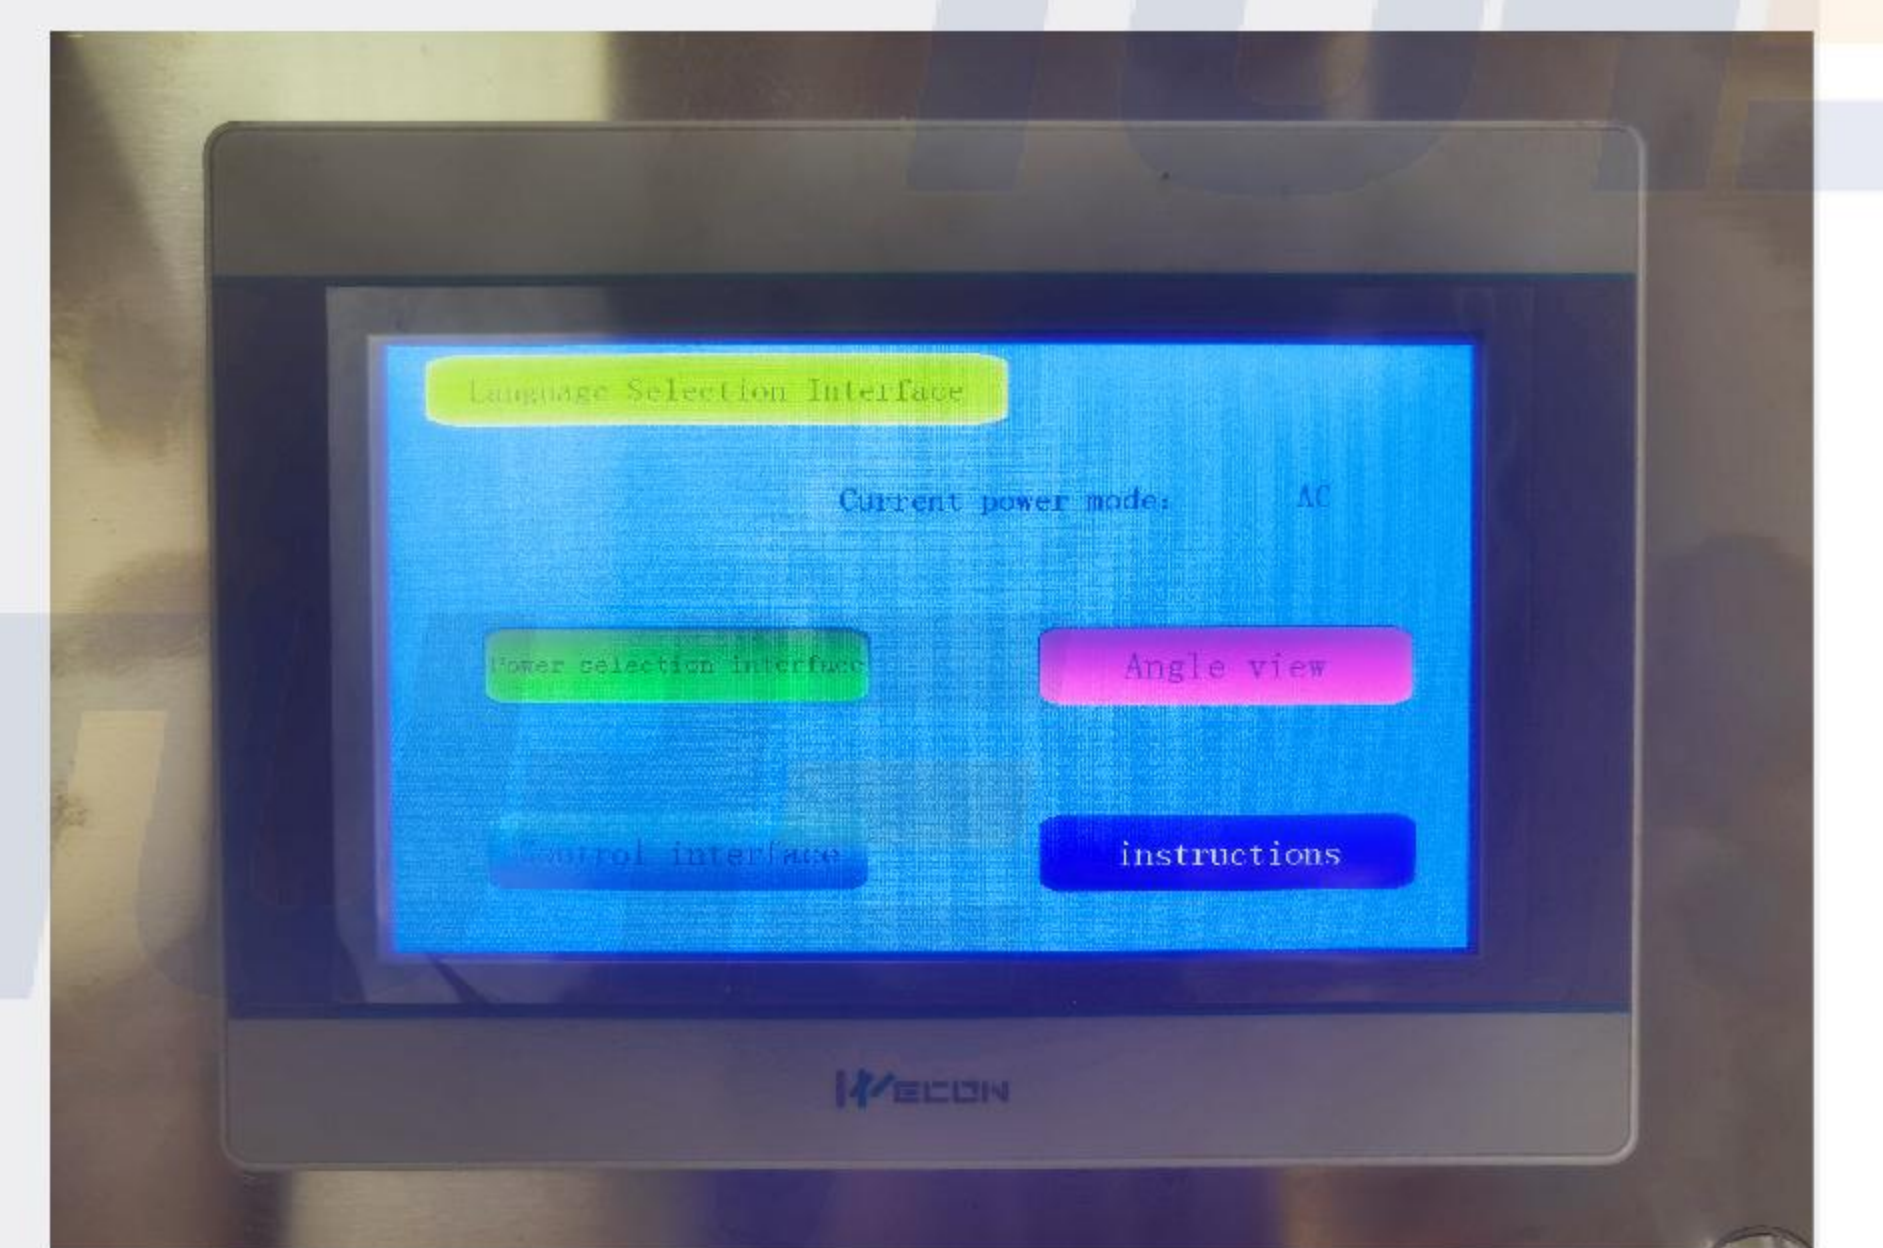

**Walking Assist  
System**

With this device you move the boom lift by remote control.



**Hydraulic Lock**

This part will lock the hydraulic oil immediately when something bad happens, to prevent the platform from falling.





| Detail Name | Description And Picture |
|-------------|-------------------------|
|-------------|-------------------------|

**Master Control Switch**

Only when you keep pushing this switch, can you operate the boom lift, to prevent it from misoperation.



**Platform Control**

You can control lifting up and down, light on and off, rotation from this control.



**Pneumatic Tyre**

Famous brand pneumatic tyre, stable and durable, tyre size can be customized.



**Platform Level Cylinder**

The platform will be always level with this cylinder adjustmen.

